

## How to ring your IP phone and PSTN number simultaneously


### Target Objective:

No matter where you are, you can answer all your business calls and make a success deal. In this application note, it will guide you step by step to setup WellSIP 6500 or SIPPBX 6200 to have parallel ringing your Mobile and IP phone simultaneously.

### Step by Step Setup Procedure:

In order to realize the functions, you only need configure the following steps in WellSIP 6500 or SIPPBX 6200:

1. Click **Configuration>Subscriber>New**, change **Hunting Method** to **Parallel (answer)** as figure1-1:

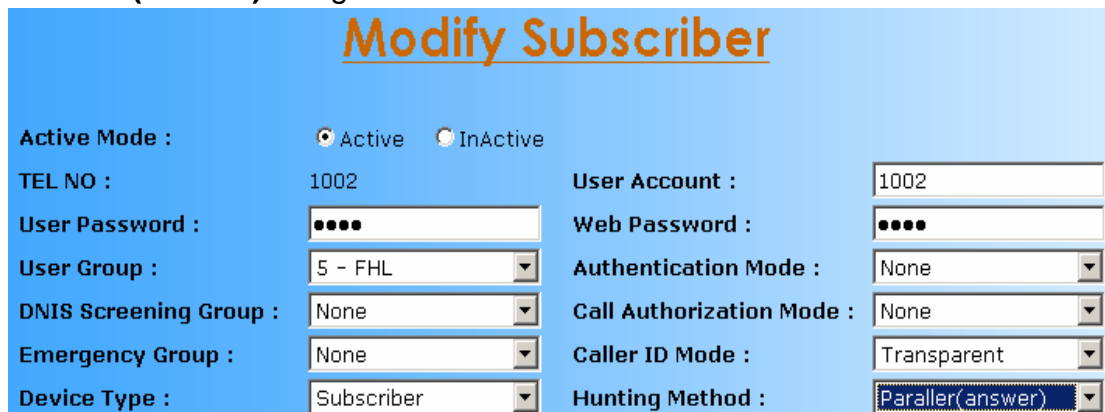

The screenshot shows the 'Modify Subscriber' configuration interface. The title is 'Modify Subscriber'. Below the title, there are several configuration fields:

- Active Mode :** Radio buttons for 'Active' (selected) and 'Inactive'.
- TEL NO :** Text input field containing '1002'.
- User Account :** Text input field containing '1002'.
- User Password :** Password input field with masked characters '••••'.
- Web Password :** Password input field with masked characters '••••'.
- User Group :** Dropdown menu showing '5 - FHL'.
- Authentication Mode :** Dropdown menu showing 'None'.
- DNIS Screening Group :** Dropdown menu showing 'None'.
- Call Authorization Mode :** Dropdown menu showing 'None'.
- Emergency Group :** Dropdown menu showing 'None'.
- Caller ID Mode :** Dropdown menu showing 'Transparent'.
- Device Type :** Dropdown menu showing 'Subscriber'.
- Hunting Method :** Dropdown menu showing 'Parallel (answer)'.

Figure 1-1

2. Check the Find Me checkbox to turn on the Find Me service as follows:



The screenshot shows the 'Setup Service' configuration page for TEL NO : 1002. The title is 'Setup Service'. Below the title, there are several service options:

- Forward Service :**
  - Unconditional
  - Busy Forward
  - 181 for Call Forward
  - Find Me
  - Find Me Hunting First
  - Auto Call Forward
  - No Answer Forward
  - Unavailable Forward
  - Announcement before Forward
  - Number Change
  - Forward subscriber only

Figure 1-2

Add your mobile or PSTN number into the Find Me detail as follows:

- Priority URI: 0912333123
- Enable Time: 0900-2000

	Priority URI	Enable Time
1	0912333123	0900-2000
2		
3		
4		
5		

Apply Cancel

After the above setting, when you have a call to your SIPPBX 6200 extension or 6500 subscriber during the time 9:00AM to 8:00PM, your mobile phone 0912333123 will ring simultaneously. Beyond the enable time, only your office IP phone will ring. To enable full day parallel ring, please set the enable time to "0000-2359"