


LP803

Portable SIP IP Phone



Black Panel, Dimension
16(H)x9.7(W)x3.5(T) CM

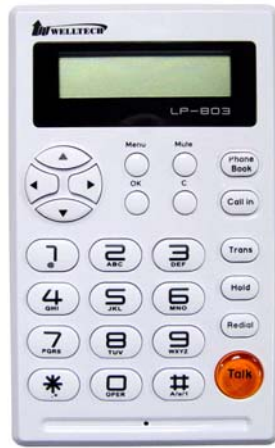

White Panel



Cable Connection



Support 3.5mm plug-in Ear
Phone and Microphone.

Support up to 3 Register Accounts at three SIP Servers

Portable IP Phone for Office, Home, Traveler and Door phone.

Excellent Loud Speaker Phone

Auto Provision feature

Color : Black and White

LP803 is a SIP IP Phone which provides portable and flexible to install anywhere such as office desktop, house wall mounted and Door Phone for visitor which connect to office IP-PBX. With excellent Loud Speaker phone, there is no need to use handset to talk over LP803. However, to keep personnel privacy talking, an external microphone and earphone jack with 3.5mm was built-in for privacy talking. Meanwhile, LP803 is convenience for a frequent traveler with Travelling Kit to accompany your trip. Without a doubt, it is definitely a multiple features IP Phone.

Compact and Portable IP Phone

LP803 is hand held size and easy to install, carry and be flexible to carry. With excellent loud speaker phone feature, you don't need to use traditional handset to talk. Good performance hand free phone call, let you talk easily and let your hands free during talking. If you need privacy talking, two 3.5mm speaker and earphone jacks were built-in to support any type of earphone to talk. You can carry with you wherever you are and just plug-in to IP Network to access Internet. You can use LP308 to make or receive call just like home or office. Comfortable view angle when it was installed at desktop. Or, install at wall with your desirable place and let you talk by hand free phone.

To select freely up to 3 SIP service Accounts

LP803 is appropriate to use for VoIP Service Providers, IP Centrex service and IP-PBX within offices and remote branch offices. Up to 3 SIP Servers (or ITSP Service provider or alternative IP-PBX) can be configured at LP803 simultaneously. You can dial one of three accounts number directly no hassle.



Welltech Computer Co., Ltd.


13F-4, No.150, Jian Yi Rd., Chung Ho City, Taipei, Taiwan
Tel : +886.2.8226.5699 Fax : +886.2.8226.5799
Email : voipinfo@welltech.com WEB: www.welltech.com

LP803

Portable SIP IP Phone

Used as Door Phone

LP803 can be configured to use as an Door Phone which is connected to office IP-PBX. Visitor presses TALK button without dialing any digits and it rings to pre-configured one or several extensions in office to talk with visitor. It increases office efficiency and elevates company's image to visitor.

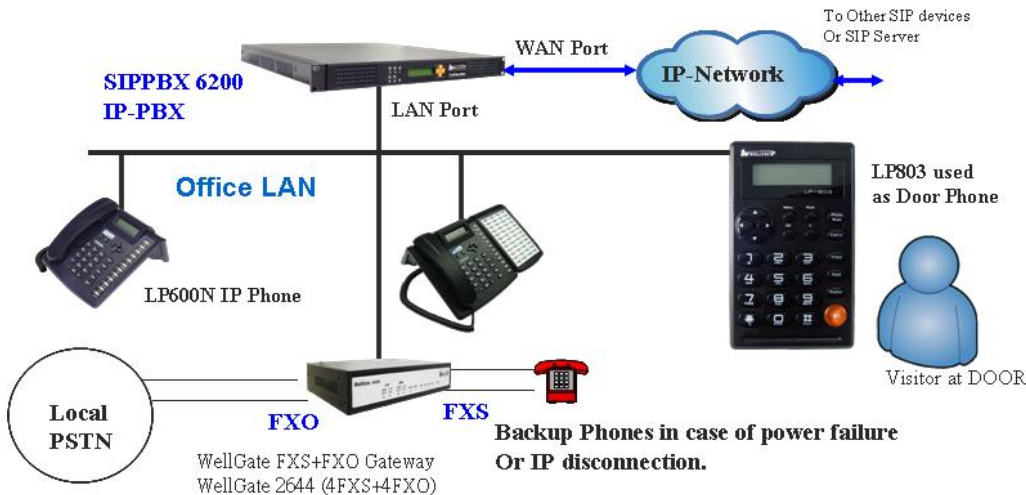

Travelling kit accompany your trip

LP803 has an option travelling bag which contains LP803, Ethernet cable, AC to DC 5V power adaptor and one power input 5V USB cable. LP803 was powered by either AC to DC5V or connect 5Vdc power cable to USB port from Notebook or PC directly. Its flexibility power sources give you carrying less accessories to travel. The dimension of travelling kit is 20.5 x 20 x 5.0 CM with Black Bag.



Provision is easier than before

Provision server software with Windows and Linux version are supported to manage, configure and firmware download remotely to LP803. It is definitely an intelligent communication gadget.

LP803

Portable SIP IP Phone

SPECIFICATION

Interface:

Ethernet port (RJ-45, 10/100 base-T)
1-WAN port, connect to IP Network
1-LAN port connect to PC with NAT
PoE (IEEE 802.3af) at WAN port : **LP803A only**
Earphone/Microphone Jack (3.5mm) for Headset
Handset Jack (RJ-9), Not Used
DC 5V power input Jack
LCD Display:
Display Format: 16 Characters (W) x 2 lines(H)
View Size: 64(W) x 17.9 (H) mm
LCD Type: TN

LCD Language Option: **English**

IP Network connection

IPv4 (RFC 791),
MAC Address (IEEE 802.3)
Static IP
DHCP Client (RFC 2131), WAN port
DHCP Server, LAN port
PPPoE
DDNS
DMZ
VLAN
Virtual Server (DHCP Server IP range)
DNS Client
PPTP VPN Client mode
SNTP Server
TCP/UDP (RFC 793/768)
RTP/RTCP (RFC 1889/1890)
IPV4 ICMP (RFC 792),
TFTP Client
QoS Support

SIP Protocol :

RFC3261 compliance
Support up-to 3 SIP Register Accounts
Support Primary and Backup SIP Proxy
SIP UDP Protocol
Support SIP compact Form
SIP Session Timer (RFC 4028)
MD5 Digest Authentication
Message Waiting Indication (RFC3842)
Event Notification (RFC3265)
REFER (RFC3515)
Support DNS SRV to locate SIP Server (RFC 3263)
Support STUN NAT Traversal
Support "rport" parameter (RFC 3581)

Audio Codec :

G.711 A-law/ μ -law, G.723.1 (6.3K/5.3K)
G.729A, GSM, G.726
Silence Suppression
VAD/CNG
Automatic Gain Control
In-band/out of band DTMF (RFC 4733 (RFC 2833)/SIP INFO)
Adaptive/Configurable Jitter Buffer
Acoustic Echo Cancellation
Volume Adjustment

Speed Dial
Phone Book
Clock, Call-Duration display
Call History of Missed, Received and Dialed
Dialing Plan with drop, replace, Insert dialing digits
Selectable Call Progress Tone
Support Personal Melody Ring
Auto Answer Mode
Support Specified Line Calling

Call Features :

Caller ID display
Voice Mail with Indication
Speed Dialing
Call Waiting/Switching between Calls
Call Forward (Busy, Unconditional, No Answer)
Do not disturb
Call Hold
Call Mute
Call Transfer
Alarm Ring
3-way conference call
Music-on-hold support (via IPPBX or local)
Redialing/pre-dialing

Hot Line (for Door Phone application)

Support Peer to Peer Dialing

MANAGEMENT :

SNTP with time zone
Multilanguage Web User Interface
Administrative Telnet CLI
2 Levels of User Access Right with Password protection
LCD Administration Login
Provides System Status
Diagnostics (debug through syslog)
Configuration Backup/Restore
Reset to Default
Support provision through MAC address

Environmental :

Dimension: 16(H) × 9.7(W) × 3.5(T) CM
Weight: 0.45kg (One unit with packing)
Operating Temp. & Humidity
- Temp.: 0°C~45°C (32°F~113°F)
- Humidity: 10%~90% relative humidity,
non-condensing

Power Adaptor:

- INPUT: AC100V~240V, 50/60Hz
- OUTPUT: DC 5V,

Power Consumption of PoE : 3.5 Watts

Approvals:

CE, FCC, LVD and RoHS

Country of origin:

Made in Taiwan

Packing Accessories (regular)

LP803 IP Phone x 1 pcs
AC to DC5V Power adaptor x 1 pcs
1 meter Ethernet cable x 1 pcs
5V USB to DC 5V power cable x 1 pcs

LP803

Portable SIP IP Phone

CD User Manual

Traveler Kits packing (Option)

Travelling bag x 1 pcs

LP803 IP Phone x 1 pcs

AC to DC5V Power adaptor x 1 pcs

1 meter Ethernet cable x 1 pcs

5V USB to DC 5V power cable x 1 pcs

CD User Manual

Warranty

One year

Ordering Information:

	LP803	LP803A	Travelling Kit
PoE	NO	YES	
LCD Language	English	English	
Headset, Ear Phone Microphone, Hand-Free interface	YES	YES	
Wall Mount	YES	YES	
Desk top	YES	YES	
Delivery Status	NOW	NOW	NOW
Option Order			YES

We provide a variety of IP Phone models which differ at features and application.

Features Comparison Table of IP Phone:

	LP801	LP389	LP600N	LP600O	LP803	WP589	LP388	LP399
application	ITSP	ITSP	IPPBX	IPPBX	ITSP	ITSP	IPPBX,ITSP	ITSP
Line No.	2	3	2	5	3	3	2	3
Register to SIP Server	2	3	1	1	3	3	1	3
IPv6	NO	YES	NO	NO	NO	NO	NO	NO
LCD	128x64 pixels	2x16 digits	2x16 digits	2x16 digits	2x16 digits	1.44"Color	2x16 digits	2x16 digits
Handset	YES	YES	YES	YES	NO	YES	YES	YES
Headset	YES, 3.5mm	YES, 3.5mm	YES, 3.5mm	YES, 3.5mm	YES, 3.5mm	NO	YES, RJ-9	NO
Speaker Phone	YES	YES	YES	YES	YES	YES	YES	YES
WiFi Phone	NO	NO	NO	NO	NO	YES	NO	NO
SIP Protocol	YES	YES	YES	YES	YES	YES	YES	YES
Provision	TR069, HTTP	HTTP, and EMS9510	IPPBX6200 built-in HTTP	IPPBX6200 built-in HTTP	YES	NO	NO	YES
Wall mount	NO	NO	NO	NO	YES	Hand held	NO	NO
analog line phone built-in option	YES	Q3-2010	NO	NO	NO	NO	NO	NO
PoE Option	YES	YES	YES	YES	YES	NO	YES	NO

EMS9510 is Welltech proprietary Provision Server which support advanced features than HTTP provision server. Some IP Phone models only support HTTP provision server in which was built-in by SIPPBX6200 IP-PBX .